


MAC-200Wc

(Wear Control)

MAC-200Wc has a Rockwell Hardness of 70 which is perfectly suited for heavy wear use. Bake treatment does not effect substrate only heated to +/- 400 °C . MAC-200Wc is perfect for high wear and moderate corrosion applications.

Benefits


- Excellent for sliding wear applications ([Rod Wear](#))
- Applied to high erosion and abrasive environments
- Suitable for high CO₂ and H₂S producing wells
- No ID Restriction
- Bond Strength > 19 K - 60 K Psi

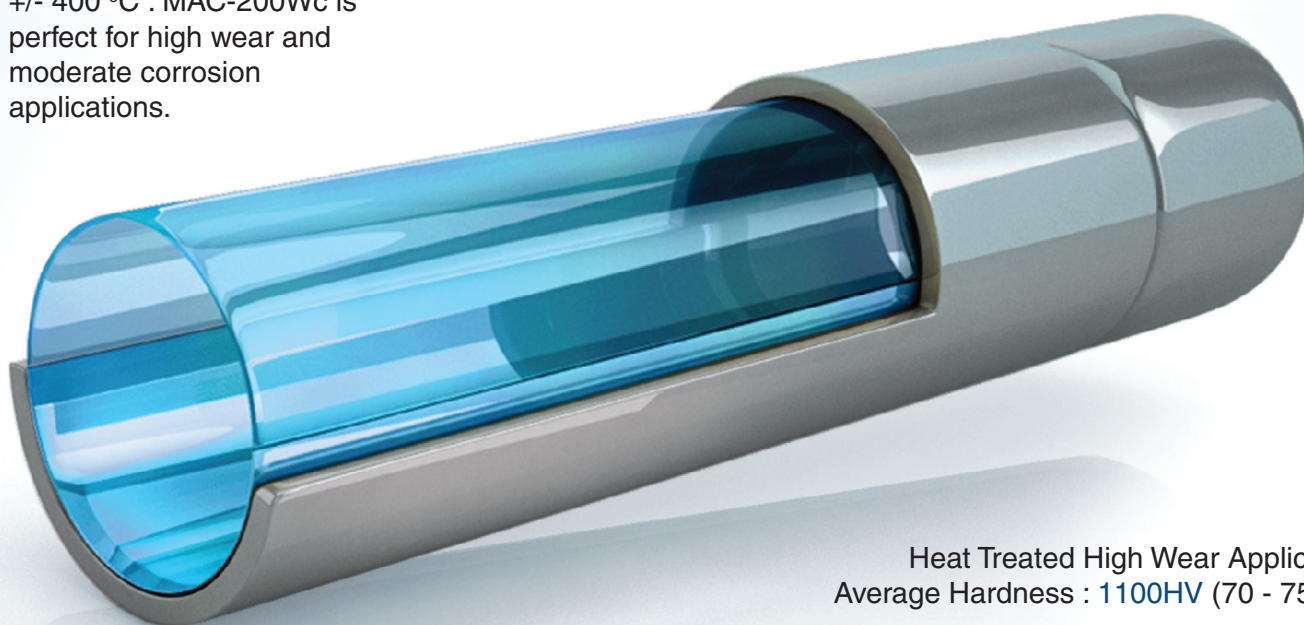

Heat Treated High Wear Applications
Average Hardness : 1100HV (70 - 75HRC)

Taber Wear Index

Representative Post-Test
Overview of Metallic Alloy
Coating with Heat
Treatment Application,
Film Thickness at
1 mil/ 25 µm and
2 mil/ 50 µm

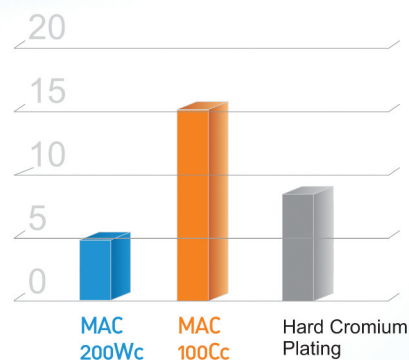

Manufacturing:
Box 1101, 1507 - 7 Street
Nisku, AB T9E 8A8
24 hr. 1-780-918-8100
Office: 1-780 979-0599

Corporate Office/Sales:
250 - 1220 Kensington Road NW
Calgary, AB T2N 3P5
Office: 403-233-7473
24 hr. 403-874-3933

Technical/Sales inquiries:
thompson.stew@gmail.com
<http://pcscanada.ca/>